



# BLINDATE



MOD. M-1



MOD. M-2



MOD. M-3



MOD. M-4



MOD. M-5



MOD. M-6



MOD. M-7



MOD. M-8



MOD. M-9



MOD. M-10



MOD. M-11



MOD. M-12



MOD. M-13



MOD. M-14



MOD. M-15



MOD. M-16



MOD. M-17




MOD. M-18



MOD. M-19



MOD. M-20

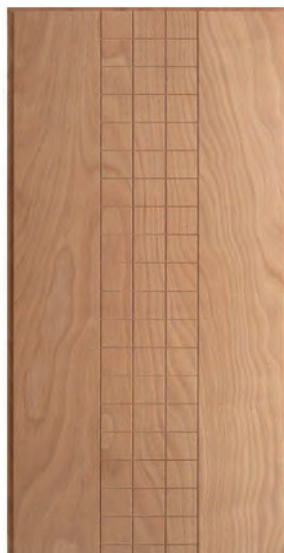

MOD. M-21



MOD. M-22



MOD. M-23



MOD. M-24

## PORTA BLINDATA 2 ANTE



### MODELLO BD 225 SPECIAL

#### DETTAGLI TECNICI

- Controtelaio in lamiera zincata 20/10 con 8 punti di ancoraggio;
- Telaio fisso in lamiera d'acciaio prerivestito colore NERO/MARRONE GOFFRATO (a scelta) di sp. 20/10;
- Anta monolamiera presso piegata d'acciaio zincato 10/10 con 2 omega di rinforzo ver-cale e 2 omega orizzontali;
- An-na monolamiera presso piegata in acciaio zincato da 10/10 con doppio omega orizzontale
- Serratura a ingranaggi a cilindro europeo
- Defender an-shock CIP 200 forma tonda
- Cilindro Europeo An--bump (con. 5 chiavi più 1 da can-ere)
- 10 Rostri an-strappo lato cerniere;
- Piastra an-trapano 30/10 a protezione della serratura;
- Doppio deviatore inferiore
- Doppio deviatore superiore
- 2 PaleE superiore ed inferiore con puntale in acciaio per chiusura an-na semifissa
- 4 Cerniere regolabili in altezza e larghezza e profondità;
- Spioncino grandangolare 200°;
- Lama parafreddo
- Limitatore di apertura
- Tappi neri in nylon
- Guarnizione anta baiante in EPDM su base adesiva
- Bragheione reggi pannello interno ed esterno in lamiera NERO/MARRO-NE goffrato
- Accessori serie tonda linea alluminio bronzato
- Dimensioni: STANDARD (110-115-120X200-205-210 luce passaggio)
- Rives-mento interno liscio: LAMINATO 6MM
- Rives-mento esterno: LAMINATO 6MM
- Cer-ficazione in classe 3 a norma UNI EN 1627
- Cer-ficazione termica 2.6 W/m2K
- Compreso pannelli lamina- 6 mm dalla mazzeia colori

#### TECHNICAL DETAILS

- Counterframe in 20/10 galvanized sheet with 8 anchoring points;
- Fixed frame in steel sheet pre-coated in EMBOSSED BLACK / BROWN color (at choice) of sp. 20/10;
- Press-folded single sheet door of 10/10 galvanized steel with 2 vertical omega reinforcement and 2 horizontal omega;
- Press-folded single sheet metal 10/10 galvanized steel with double horizontal omega
- European cylinder gear lock
- Defender an-shock CIP 200 round shape
- An - bump European cylinder (with 5 keys plus 1 to be can-ere)
- 10 anti-tear bolts on the hinge side;
- 30/10 anti-drill plate to protect the lock;
- Double lower diverter
- Double upper diverter
- 2 upper and lower blades with steel tip for semi-fixed loop closure
- 4 hinges adjustable in height and width and depth;
- 200 ° wide-angle peephole;
- Paraffin blade
- Opening limiter
- Black nylon caps
- Sliding door gasket in EPDM on an adhesive base
- Internal and external panel support brace in embossed BLACK / BROWN sheet metal
- Accessories round series bronzed aluminum line
- Dimensions: STANDARD (110-115-120X200-205-210 passage light)
- Smooth internal coating: 6MM LAMINATE
- External coating: 6MM LAMINATE
- Class 3 certification according to UNI EN 1627
- 2.6 W / m2K thermal certification
- Including foil panels - 6 mm from the color chart

## PORTA BLINDATA 1 ANTA



## MODELLO BD 50SPECIAL

### DETTAGLI TECNICI

- Controtelaio in lamiera zincata 20/10 con 8 pun- di ancoraggio;
- Telaio fisso in lamiera d'acciaio prerives-ta colore NERO/MARRONE GOFFRATO (a scelta) di sp. 20/10;
- Anta monolamiera presso piegata d'acciaio zincato 10/10 con 2 omega di rinforzo ver-cale e 2 omega orizzontali;
- Serratura a ingranaggi a cilindro europeo
- Defender an-shock CIP 200 forma tonda
- Cilindro Europeo An-bump (con. 5 chiavi più 1 da can-ere)
- 5 Rostri an-strappo lato cerniere;
- Piastra an-trapano 30/10 a protezione della serratura;
- Doppio deviatore superiore;
- Doppio deviatore inferiore;
- 2 Cerniere regolabili in altezza e larghezza e profondità;
- Spioncino grandangolare 200°;
- Lama parafreddo
- Limitatore di apertura
- Tappi neri in nylon
- Guarnizione anta baiante in EPDM su base adesiva
- Bragheione reggi pannello interno ed esterno in lamiera NERO/MARRO-NE goffrato
- Accessori serie tonda linea alluminio bronzato Dimensioni: STANDARD (80-85-90X200-205-210 luce passaggio)
- Rives-mento interno liscio: LAMINATO 6MM
- Rives-mento esterno liscio: LAMINATO 6MM
- Cer-ficazione in classe 3 a norma UNI EN 1627
- Cer-ficazione termica 2.6 W/m2K

### TECHNICAL DETAILS

- Counterframe in 20/10 galvanized sheet with 8 anchoring points;
- Fixed frame in pre-coated steel sheet in BLACK / EMBOSSED BROWN color (at your choice) of sp. 20/10;
- Press-folded single sheet door of 10/10 galvanized steel with 2 vertical omega reinforcement and 2 horizontal omega;
- European cylinder gear lock
- Defender an-shock CIP 200 round shape
- An - bump European cylinder (with 5 keys plus 1 to be can-ere)
- 5 Rostrums on the hinges side;
- 30/10 anti-drill plate to protect the lock;
- Double upper diverter;
- Double lower diverter;
- 2 hinges adjustable in height and width and depth;
- 200 ° wide-angle peephole;
- Paraffin blade
- Opening limiter
- Black nylon caps
- Sliding door gasket in EPDM on an adhesive base
- Internal and external panel support brace in embossed BLACK / BROWN sheet metal
- Accessories round series bronzed aluminum line Dimensions: STANDARD (80-85-90X200-205-210 passage light)
- Smooth internal coating: 6MM LAMINATE
- Smooth external coating: 6MM LAMINATE
- Class 3 certification according to UNI EN 1627
- 2.6 W / m2K thermal certification



**Giordano**  
WINDOWS & DESIGN

**DGP Giordano s.n.c.**

Via Casa Pagano, 14 Angri 84012 (SA) Italy

Tel.: +39 081 31 86 990

**web:** [www.dgpgiordano.com](http://www.dgpgiordano.com)

**mail:** [info@dgpgiordano.com](mailto:info@dgpgiordano.com)